


DIN 7973 - Slotted Raised Countersunk Head Tapping Screws

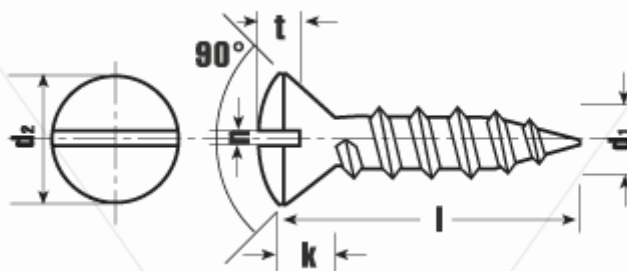

All measurements in millimeters (mm)

| | | | | | | | |
|--------------|------|------|-----|------|------|------|------|
| d1 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
| d2 | 5.5 | 6.8 | 7.5 | 8.1 | 9.5 | 10.8 | 12.4 |
| k max | 1.7 | 2.1 | 2.3 | 2.5 | 3 | 3.4 | 3.8 |
| n | 0.8 | 1 | 1 | 1.2 | 1.2 | 1.6 | 1.6 |
| t min | 1.25 | 1.55 | 1.7 | 1.85 | 2.15 | 2.45 | 2.85 |

FOR INFORMATION PURPOSES ONLY

©Fastener Network Holdings Ltd, Unit B, Grazebrook Industrial Park, Peartree Lane, Dudley, West Midlands, DY2 0XW, United Kingdom

T: +44 (0) 1384 217 600 F: +44 (0) 1384 217 606

www.fastenernetwork.co.uk